

EVOLUTION II™

High Resolution
Ink Jet Printer

Ink Jet Printer Series

EVOLUTION II is the second High Resolution Ink Jet Printer in the **EVO-LUTION** series. It features a complete software package, a backlit WYSIWYG display, up to four lines of print and eight barcode symbologies as standard.



A Complete System

EVOLUTION II is complete and ready to install right out of the box. The system includes the mounting bracketry, a hand held controller with tactile keypad for message entry and the printhead module with internal product sensor.

Inkjet Technology by Hewlett Packard

Designed by Digital Design, the **EVOLUTION II** is powered with ink jet technology by Hewlett Packard. This combination gives you the benefits of an affordable, compact, and efficient design coupled with the reliability of printhead technology by Hewlett Packard.

Optimum Print Resolution

EVOLUTION II delivers bold, highly legible and fully formed characters in a print resolution of 300 dpi at production line speed of up to 200 feet per minute.

Print up to Four Lines of Text

Print a one line message in 1/2" characters, two lines of text in 7/32" high characters, three lines of 1/8" or four lines of 3/32". All four character heights are selectable through the font key on the hand held controller.

Ink Supply

Built into the cartridge is a 42 cc ink supply. Once the ink in the cartridge is depleted, it can be taken out, disposed of and a new ink cartridge inserted in just minutes.



Breakaway Printhead Protection

A typical powered conveyor or case taper corrugated cartons can sometimes come through skewed or off center. The horizontal adjusting rod that holds the printhead module has been designed with a breakaway feature that moves the printhead out of harms way should the carton come in contact with it. A detent in the assembly allows you to securely snap the printhead back into position after the misaligned carton has past.

Add-On Printheads

Adding another printhead is as simple as sliding it on. Each printhead module is manufactured with a dovetail slot on one side and a dovetail slide on the other. You can attach up to three additional printheads on a single bracket by inserting the slide on one into the slot on the other. A small RS 485 data cable is then used to connect the modules. This allows the hand held controller to network all of the printheads on the production line.



Customized

EVOLUTION II is supplied with a built in font style. Optional alternative fonts are available and can be downloaded into the printhead modules through flash card media.

Logos are another option, and up to 3 can be downloaded into the message via the flash card.

Networking Capabilities

The hand held controller has the capability of controlling up to 32 individual printhead modules through the use of a RS 485 data cable. A small data cable is used to connect the modules on the same production line while a longer cable connects them to the next production line in the manufacturing area. The printhead modules have a discreet address which is used to identify them for message entry functions.

Complete PC control of the **EVOLUTION II** network through our **EVOLUTION-NET** software is available as an option.



EVOLUTION II
Hand Held Controller



Printhead Module with Bracketry



Technical Specifications

Complete Standard System Includes:

A controller with backlit WYSIWYG display and tactile keypad for message entry. A high resolution printhead module with complete mounting bracket and internal product sensor for side coding applications.

Standard Operating Features

Alpha/Numeric character set plus special characters
Ability to control up to 32 printheads via RS 485
Bracketry capable of mounting up to 4 printheads
Print Resolution: 300dpi at 200 feet (61m) per minute
Character Heights: 1/2" (12.7mm), 7/32" (5.5mm)
1/8" (3.2mm), 3/32" (2.4mm)
Message Length: 48 characters of 1/2" height
96 characters of 7/32" (48 per line)
144 characters of 1/8" (48 per line)
192 characters of 3/32" (48 per line)

Message Storage: Up to 100 messages in Controller
Programmable line speed
Programmable print direction
Programmable print delay
Inter-character spacing
Inverted printing
Automatic message repeat
Password protection
Variable time formats
Variable date formats
Sequential numbering
Shift coding
Date offset
Product counter
Multiple language prompts: English and Spanish

Production Speed

Up to 200 feet (61m) per minute @ 300dpi

Ink Supply

Cartridge volume: 42cc
Porous Colors: Black, Blue, Red, Green, Yellow, UV Visible
Semi-Porous Colors: Black, Blue, Red
Low ink monitoring

Power Required

110-240 VAC, 50-60Hz 0.5A

Environmental

50F - 104F (10C - 40C)
Up to 80% RH non-condensing

Physical Dimensions


Controller: 4.125" wide x 8.750" long x 1.500" deep
Printhead module: 2" wide x 4" deep x 3" high

Standard Barcodes Included

I 2 of 5	Code 39
UPC-A	UPC-E
128 B	128 C
EAN 8	EAN 13

Hardware Options

Add-on High Resolution printhead modules
Spring loaded carton follower
Top coding bracketry
Floor stand
External product sensor
External encoder

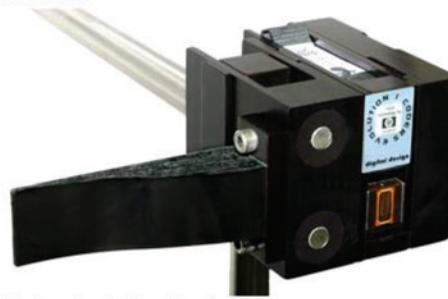

Spring loaded carton follower

Software Options

Alternative fonts: Downloadable via custom programmed flash card media
Logos: Ability to load up to 3 logos into the message
Downloadable via flash card media
Barcodes: Additional barcodes such a Data Matrix can be supplied as options and downloaded via the flash card media.
EVOLUTION-NET software for PC control of network

Authorized EVOLUTION Distributor:

For more info about product ID solutions and materials handling from Raab Sales, contact us at:

RAAB SALES, INC.
14521 W. 96TH TERRACE • LENEXA, KS 66215
1-800-348-6307 • inquiry@raabsales.com
www.raabsales.com



inkjet
technology by 

digital design. inc. 67 Sand Park Road, Cedar Grove, NJ 07009

- (800)967-PRINT
- (973)857-0900
- FAX: (973)857-0607
- Internet: www.evolutioninkjet.com
- E-mail: sales@evolutioninkjet.com